


# 3 Record Memory, Lap and HRT zone area Set Up

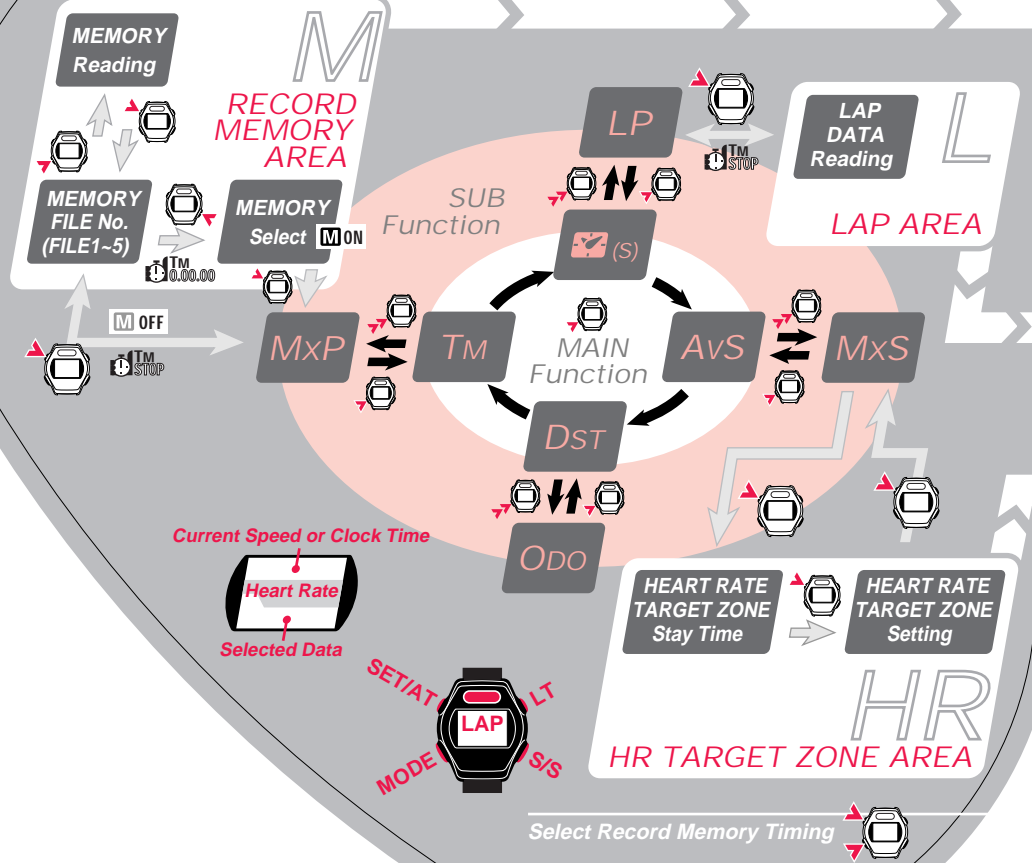

URL: <http://www.cateye.com>

# 4 Set Up Detail

### Record Memory Area

**M OFF** **TM STOP** Switches the file No.

**RECORD MEMORY FILE Select** Deletes displayed file data.

Records Memory measurement select. **0.00.00**

When **M** symbol is on, record memory measuring is on stand-by state. When **M** is off, the display returns to the MxP.

---

**RECORD MEMORY Reading** Displays the next memory data.

### M

### Lap Area

**TM STOP** Displays the next Lap data.

**LAP DATA Reading** Displays the previous Lap data.

### L

### HR Target Zone Area

**HEART RATE TARGET ZONE Stay Time** Switches HR target zone one after another, from 1 to 4, then returns to maximum speed.

Clears heart rate target zone data.

---

**HEART RATE TARGET ZONE Setting** Increases (+) the flickering number.

Decreases (-) the flickering number.

Switches the HR target zone.

Switches the alarm sound ON or OFF.


### HR

MSC2DX

E

Copyright © 1999 CAT EYE Co., Ltd. MSC2DXQCE99042D-1 0687521

# 1 Basic Operation and Functions

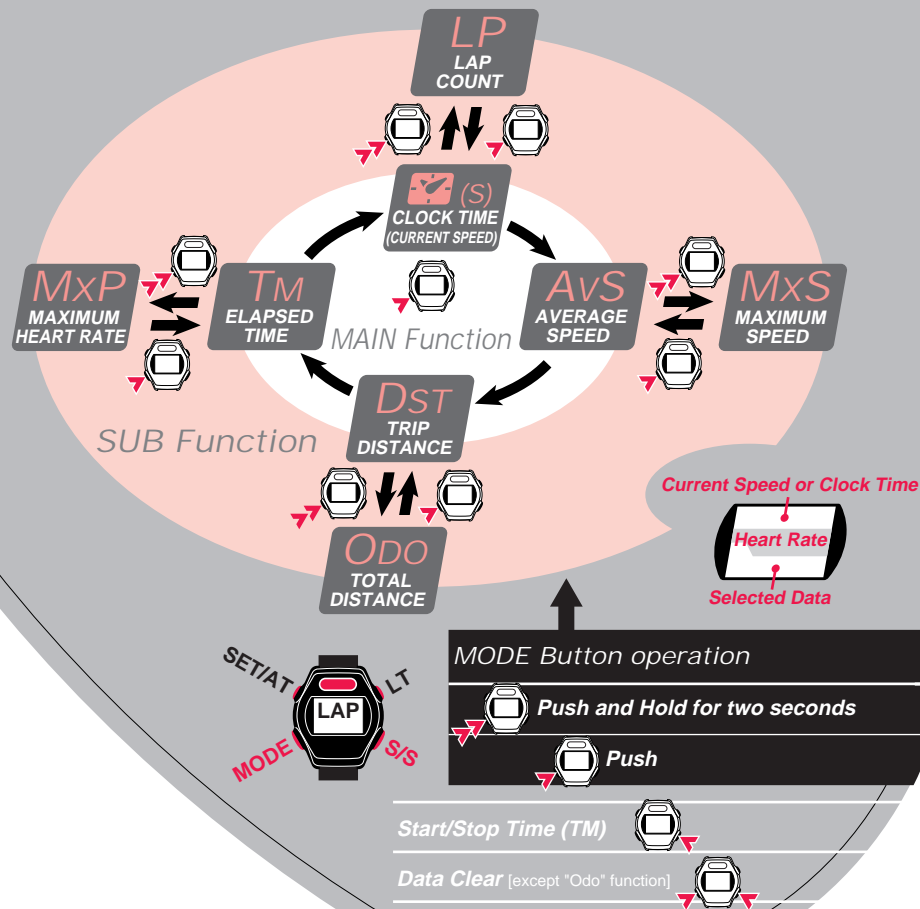

# 2 Set Up the MSC-2Dx

